

KERN PCD 10K-3

High-resolution precision balance with removable display for maximum flexibility



Eccentric loading at 1/3 [Max]	5 g
Maximum creep (15 minutes)	4 g
Maximum creep (30 minutes)	8 g

Approval	
CE mark	✓

Display	
Display type	LCD
Display backlight	✓
Display digit height	21 mm
Languages of the user interface	English

Construction	
Dimensions device (W×D×H)	165×280×75 mm
Dimension display device (W×D×H)	140×46×75 mm
Dimension housing (W×D×H)	165×280×75 mm
Dimensions weighing platform (W×D×H)	165×165×73 mm
Dimensions completely mounted (W×D×H)	165×280×75 mm
Material display housing	Plastics
Material housing	plastic
Material weighing plate	stainless steel
Dimensions weighing surface (W×D)	160×160 mm
Display device cable length	1,2 m
Levelling feet adjustable	✓
Stand height	250 mm
Stand inclinable	✓

Functions	
Number of keys for operation	5
Auto-off interval(s) in mains power mode	off
Auto-off interval(s) in battery mode/rechargeable battery mode	3 min
Tare function	manual (multi)
Percentage determination	✓
Counting function	✓
Function for averaging under unstable weighing conditions	✓
Peak function	✓
Recipe/summing level	Rez A (Net total)
Underfloor weighing	None
Interfaces	RS-232 standard

Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PCD

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	10000 g
Readability [d]	1 g
Resolution	10.000
Linearity	± 3 g
Reproducibility	1 g
Tare range	10000 g
Default unit	g

Units	g
	dwt
	tl (Tw)
	tl (HK)
	ozt
	mo
	lb
	oz
	ffa
	tol

USP Minimum weight of sample (k = 2, U = 0.1%)	2 kg
Adjustment options	Adjusting with external weight
Recommended adjusting weight	10 kg (M1)
Possible calibration points	2 kg; 5 kg; 7 kg; 10 kg
Stabilization time	3 s
Warm-up time	30 min

KERN PCD 10K-3



High-resolution precision balance with removable display for maximum flexibility

Counting

Smallest piece weight when piece counting - laboratory conditions	2 g
Smallest piece weight when piece counting - normal conditions	20 g
Reference quantity	5, 10, 20, 25, 50
Counting resolution (laboratory conditions)	5.000

Power Supply

Input voltage power supply / power [Max]	220 V - 240 V AC, 50 Hz
Input voltage device / power [Max]	9 V, 300 mA
Plug-in power supply type	Power adapter
Supplied power supply	Power supply unit
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	US
Rechargeable battery optional	Rchrg. battery optional
Rechargeable battery charging time	10 h
Rechargeable battery operating time - backlight on	12 h
Rechargeable battery operating time - backlight off	24 h
Battery	9 V block
Battery connection	Plug-in terminals
Battery operating time	12 h

Environmental conditions

Humidity of environment [Max]	80 %
Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Packing & Shipping


Readability force [d] (N)	1 d
Dimensions packaging (W×D×H)	250×360×165 mm
Net weight	1,661 kg
Shipping method	Parcel service
Net weight approx.	1,8 kg
Gross weight approx.	2,6 kg
Shipping weight	3 kg

Services (optional)

Article number for adjustment at the location of installation	961-248
Article number for DAkkS calibration	963-128
Article number for certificate of conformity (verification)	969-517

Pictograms

STANDARD

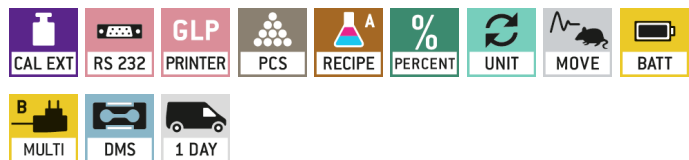

OPTION

