Product Information



Elmasonic Accessory - Elma Mutebox

Noise protection box

- Noise of the ultrasonic cleaning unit operated in the mute box is reduced by max. 85
- vapors are exhausted via a silenced drain, so that no heat or moisture builds up inside the box. build-up of moisture inside the box
- · laterally arranged halogen lamps
- Stainless steel jacket
- Product contents:

Elma Mutebox ML: 1x Elma Mutebox ML, 1x Bottom tray with gland plate, 1x Power supply unit,

1x Manual

Elma Mutebox XL: 1x Elma Mutebox XL, 2x Bottom tray with gland plate, 1x splash plate

1x Power supply unit, 1x Manual



Ultrasonic devices not included in the scope of delivery

Unit size	10	20	30	40	60	100	120	180	70	80	150	200	300			
Size		ML									XL					
Order number		1111901								1123006						
Suitable for unit size	10	20	30	40	60	100	120	180	70	80	150	200	300			
Elmasonic Easy	•	•	•	•	•	•	•	•					•			
Elmasonic Select			•	•	•	•	•	•		•	•		•			
• Elmasonic P			•		•		•	•	•				•			
Elmasonic xtra TT			•		•		•					•				

05 10 Subject to technical and visual modification

Product Information



Elmasonic Accessory - Elma Mutebox

Noise protection box

Technical Data

Unit size	10	20	30	40	60	100	120	180	70	80	150	200	300		
Ext. Dimensions W / D / H (mm) (Lid and door closed)	545 / 530 / 525									860 / 605 / 525					
Ext. Dimensions W ₁ / D ₁ / H ₁ (mm) (Lid and door open)	555 / 975 / 1015									860 / 975 / 1085					
Int. Dimensions W ₂ / D ₂ / H ₂ (mm)	430 / 380 / 445									710 / 450 / 445					
Weight (kg)	18,9								26,2						
Mains voltage (V~)	100 - 240														

Product Information




Elmasonic Accessory - Elma Mutebox


Noise protection box


Dimension definition


External dimensions (Lid and door closed)













External dimensions
(Lid and door opened)

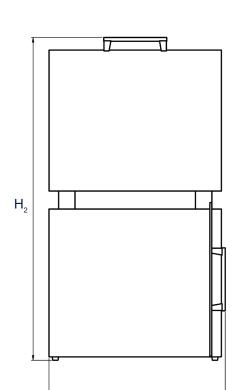

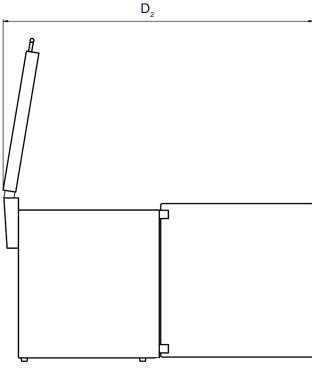

The drawings are meant as a visualization aid and are not true to scale.

Technical specifications serve as orientation values and are subject to tolerances due to production and manufacturing. Proper operation can only be guaranteed when using original Elma accessories.