

# Ultrasonic cleaner

digital, with lid and basket, 3.3 l - 22 l, integrated controller, HF frequency 40 kHz

## WUC-D digital, with lid & basket

### Ideal for:

- cleaning to remove dirt, grease, waxes and oil from all laboratory instruments by ultrasonic frequency

### Features:


- convenient preset function of heating and timer
- HF frequency 40 kHz
- multi frequency sonication body
- temperature range from ambient to 80°C
- bottom-mounted drain valve (WUC-D10H and WUC-D22H)
- maximum 60 minutes cleaning time
- microprocessor control: timer, temperature and output control
- FND display
- CE certified and unique serial number for tracing
- WUC-D03H model includes degassing function for very strong cleansing

### Controller:

- **digital** controller for timer, temperature and output control



Model	WUC-D03H	WUC-D06H	WUC-D10H	WUC-D22H
Capacity	3.3 l	6 l	10 l	22 l
HF-peak-out	100 W	253 W	407 W	528 W
Heating temperature & power	ambient to 80°C, 172 W		ambient to 80°C, 258 W	ambient to 80°C, 344 W
Timer	0 - 30 min.	0 - 60 min.		
Drain-valve	-		1/2" NPT	
Inner tank size (WxDxH)	240 x 140 x 100 mm	290 x 150 x 150 mm	240 x 140 x 150 mm	500 x 300 x 150 mm
Weight	3.4 kg	5.8 kg	8 kg	12.9 kg
Packing size & gross weight	320 x 200 x 290 mm, 3.7 kg	360 x 220 x 350 mm, 6.3 kg	440 x 320 x 360 mm, 8.5 kg	640 x 380 x 370 mm, 13.4 kg
Power consumption	290 W	425 W	665 W	872 W
Power supply	1 Phase AC 120V, 60 Hz or AC 230V, 50/60 Hz			
Order number 230V	DH.WUC.D03H	DH.WUC.D06H	DH.WUC.D10H	DH.WUC.D22H
Order number 120V	DH.WUC.D103H	DH.WUC.D106H	DH.WUC.D110H	DH.WUC.D122H

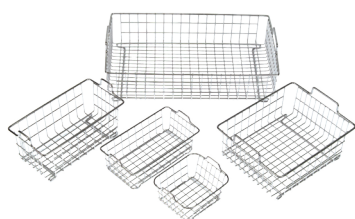

Stainless steel wire baskets for ultrasonic cleaner WUC-D

For device	Capacity	Measurements	Article	Order number
WUC-D03H	3.3 l	215x115xh65 mm	B03	DH.WUC.B03
WUC-D06H	6 l	247x123xh96 mm	B06	DH.WUC.B06
WUC-D10H	10 l	262x206xh93 mm	B10	DH.WUC.B10
WUC-D22H	22 l	452x263xh93 mm	B22	DH.WUC.B22